

STANDARD
SKIRTING TRUNKING PROFILE

90/1




Internal
Corners
90.1300



External
Corners
90.1310



External Corner
- Covers Only
90.1320




Flat T Intersection
90.1500



Flat Bend
90.1400




Power and Data
Fixing Plates - 70.0040
Supplied in pairs



Joining Pieces
Rivet or screw fix
Supplied in pairs
10.0000





45 Degree End Caps
Left Ending - 90.1600
Right Ending - 90.1600



90 Degree End Cap
Right and Left Ending.
Rivet or screw fix to
profiles. 90.1620

Profile Lengths includes Covers
3.1m - 90.1130
6.2m - 90.1160

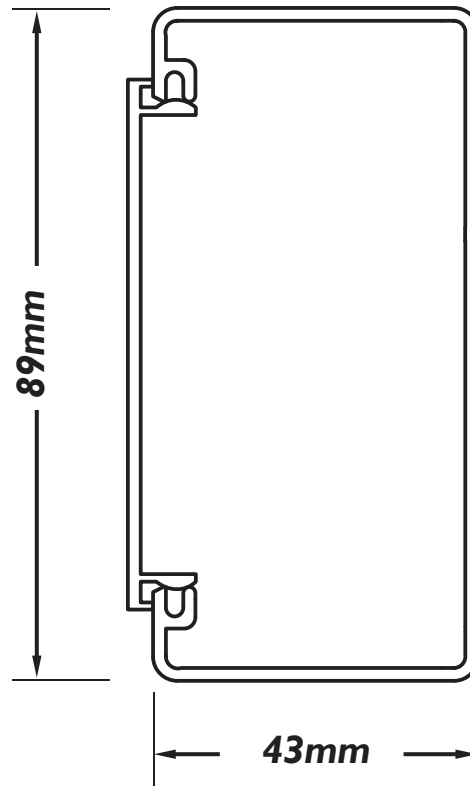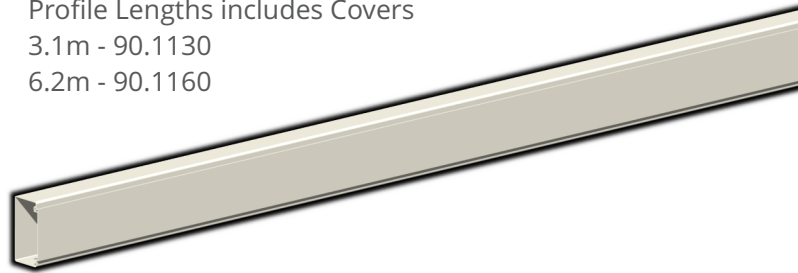

Pillar Units (see Pillar Surrounds Page 81)
Site dimensions required, Corner cover pieces
included
Two Sides - 90.1620
Three Sides - 90.1630
Four Sides - 90.1640. Fabricated in two parts
includes Joiners and provision for dropper feeds.