

STANDARD
SKIRTING TRUNKING PROFILE

C5/150/2

Profile Lengths includes Covers

3m - 150.2130

6m - 150.2160





Internal
Corners
150.2300



External
Corners
150.2310



External Corner
- Covers Only
150.2320

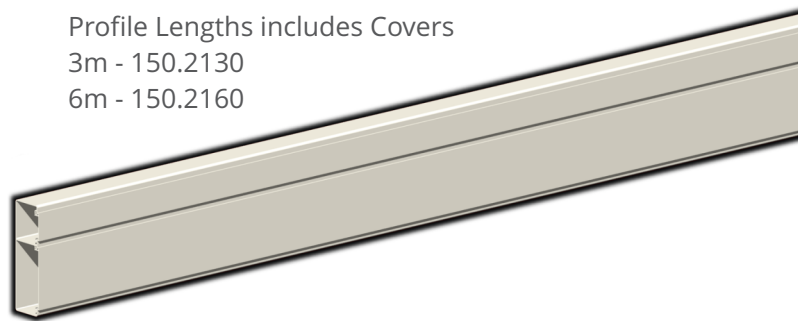

Flat T Intersection
Data left
150.2500




Flat T Intersection
Data right
150.2510




Flat Bend
Data External
150.2410




Flat Bend
Data Internal
150.2400

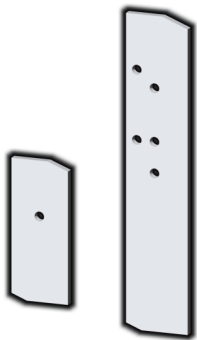


Upper Channel
Power Fixing Plates
38.0040
Lower Data 84.0040
Supplied in pairs




Joining Pieces
Rivet or screw fix
Supplied in pairs
10.0000



Conversion Unit
to allow standard
power and data
fittings.

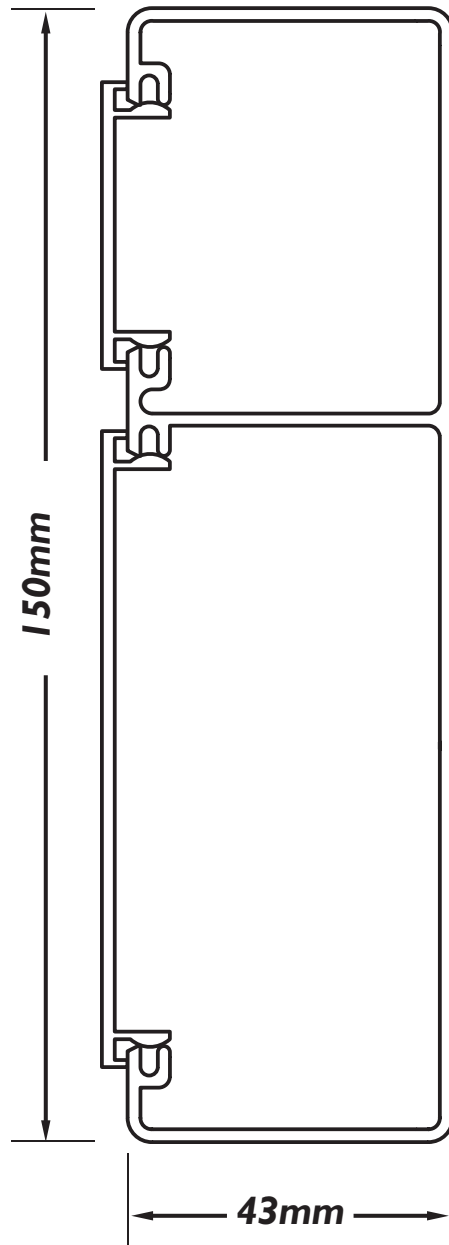

45 Degree End Caps
Left Ending - 150.2600
Right Ending - 150.2610



90 Degree End Cap
Right and Left Ending.
Rivet or screw fix to
profiles. 150.2620

Pillar Units (see Pillar Surrounds Page 81)

Site dimensions required, Corner cover pieces included

Two Sides - 150.2620

Three Sides - 150.2630

Four Sides - 150.2640. Fabricated in two parts includes Joiners and provision for dropper feeds.