

STANDARD
SKIRTING TRUNKING PROFILE


C5/160/2



Internal
Corners
160.2300



External
Corners
160.2310





External Corner
- Covers Only
160.2320

Profile Lengths includes Covers

3m - 160.2130

6m - 160.2160

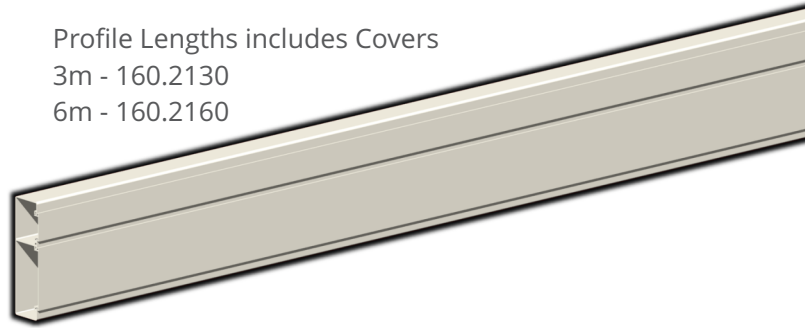

Flat T Intersection
Data left
160.2500




Flat T Intersection
Data right
160.2510




Flat Bend
Data External
160.2410




Flat Bend
Data Internal
160.2400

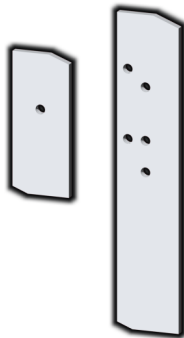


Upper Channel
Power Fixing Plates
38.0040
Lower Data 84.0040
Supplied in pairs




Joining Pieces
Rivet or screw fix
Supplied in pairs
10.0000



Conversion Unit
to allow standard
power and data
fittings.

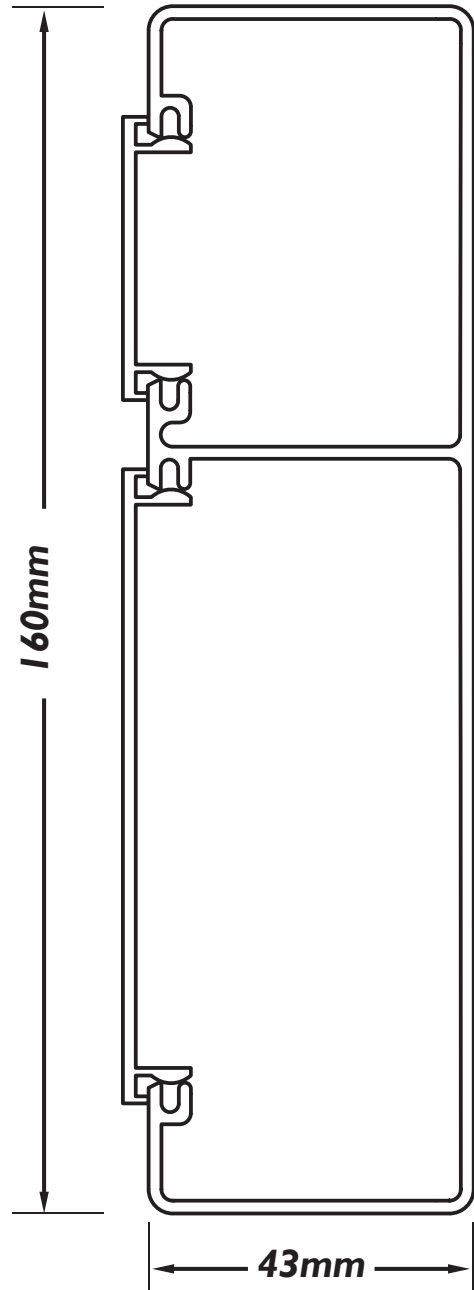

45 Degree End Caps
Left Ending - 160.2600
Right Ending - 160.2610



90 Degree End Cap
Right and Left Ending.
Rivet or screw fix to
profiles. 160.2620

Pillar Units (see Pillar Surrounds Page 81)

Site dimensions required, Corner cover pieces included

Two Sides - 160.2620

Three Sides - 160.2630

Four Sides - 160.2640. Fabricated in two parts includes joiners and provision for dropper feeds.