

STANDARD
SKIRTING TRUNKING PROFILE

C5/160/3




Internal
Corners
160.3300




External
Corners
160.3310



External Corner
- Covers Only
160.3320




Flat T Intersection
160.3500



Flat Bend
Data Internal
160.3400



All Channels Data
and Power Fixing
Plates 38.0040
Supplied in pairs




Joining Pieces
Rivet or screw fix
Supplied in pairs
10.000




45 Degree End Caps
Left Ending - 160.3600
Right Ending - 160.3610



90 Degree End Cap
Right and Left Ending.
Rivet or screw fix to
profiles. 160.3620

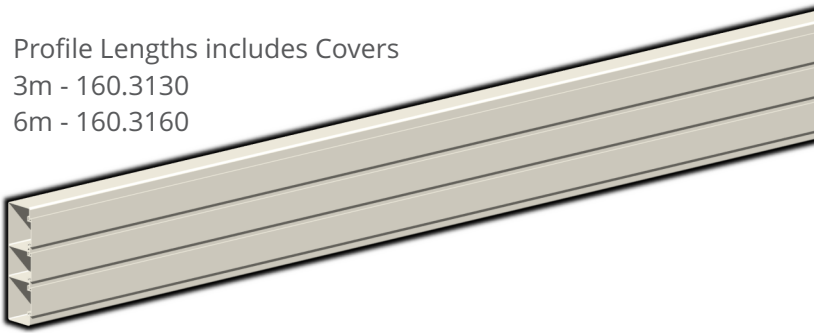

Profile Lengths includes Covers
3m - 160.3130
6m - 160.3160

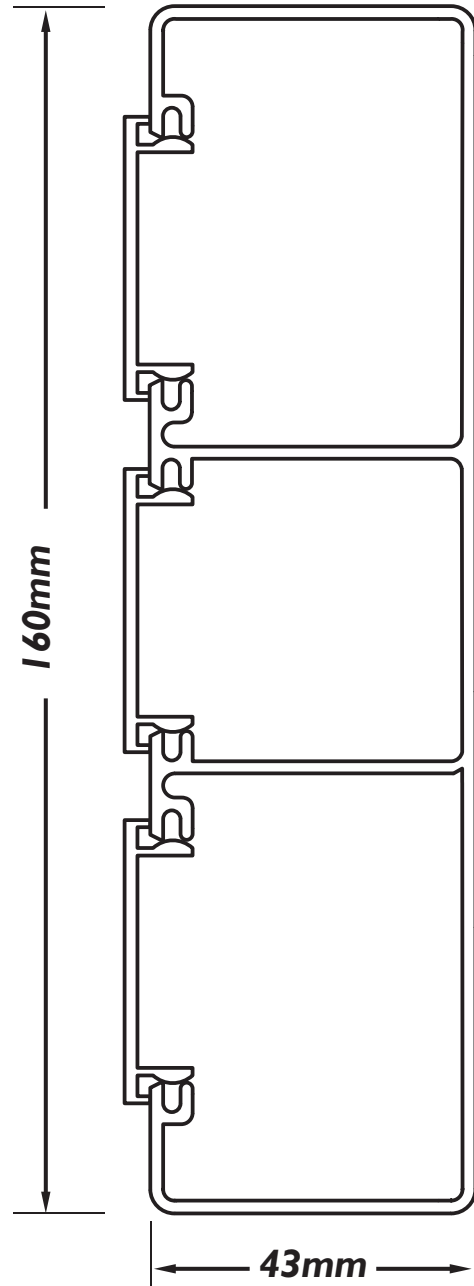

Pillar Units (see Pillar Surrounds Page 81)
Site dimensions required, Corner cover pieces
included
Two Sides - 160.3620
Three Sides - 160.3630
Four Sides - 160.3640. Fabricated in two parts
includes provision for dropper feed and Joiners