


CAT 6 CAPABLE
SKIRTING TRUNKING PROFILE
C6/156/2 Recessed


Profile Lengths includes Covers
3m - 156.2136
6m - 156.2166

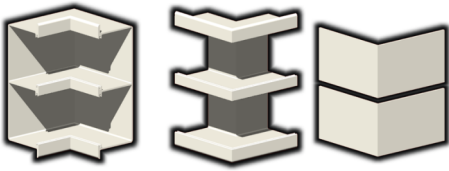

Internal
Corners
156.2306


External
Corners
156.2316

External Corner
- Covers Only
156.2326

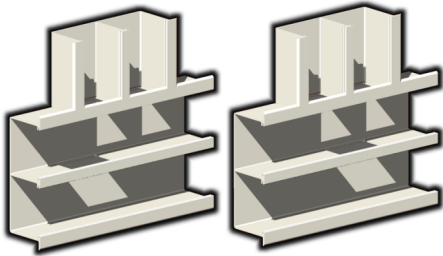


Flat T Intersection
Data left
156.2506

Flat T Intersection
Data right
156.2516

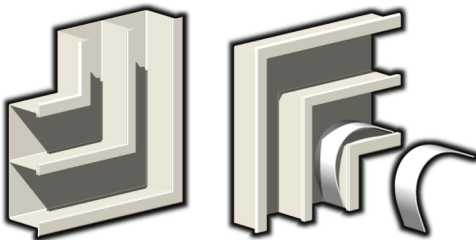

Flat Bend
Data External
156.2416

Flat Bend
Data Internal
Includes PVC Rider
156.2406



Joining Pieces
Rivet or screw fix
Supplied in pairs
156.2106

Power and Data Fixing Plates
Upper power channel - 70.0040
Lower data channel - 70.0040
Supplied in pairs

Pillar Units
Site dimensions required.
Corner cover pieces included.
Two Sides - 156.2626
Three Sides - 156.2636
Four Sides, fabricated in two parts, includes
Joiners and provision for dropper feeds - 156.2646
(see Pillar Surrounds Page 81)

