

CAT 5 SKIRTING
TRUNKING PROFILE
CAT 5/115/1



Internal
Corners
115.1300





External
Corners
115.1310




External Cover
- Incl with Ext Cnr
84.0380

Profile Lengths
includes Covers
3m - 115.1130
6m - 115.1160

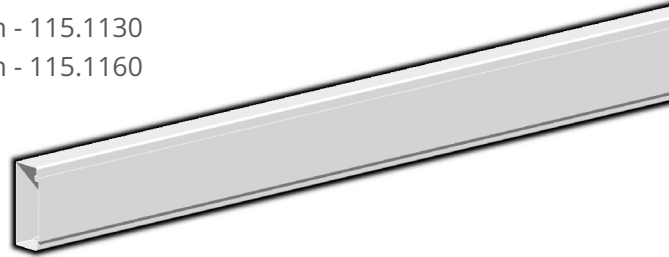

Flat T Intersection
115.1500

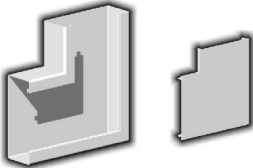


Flat Bend
Left/right identical
115.1400


Cover - incl
with Flat Bends
84.0470





Power and Data
Fixing Plates
84.0040
Supplied in pairs



Joining Pieces
Rivet - screw fix
Supplied in pairs
10.0100



PDL 591CP
Conversion Unit
to allow standard
power and data fittings
(supply by others).

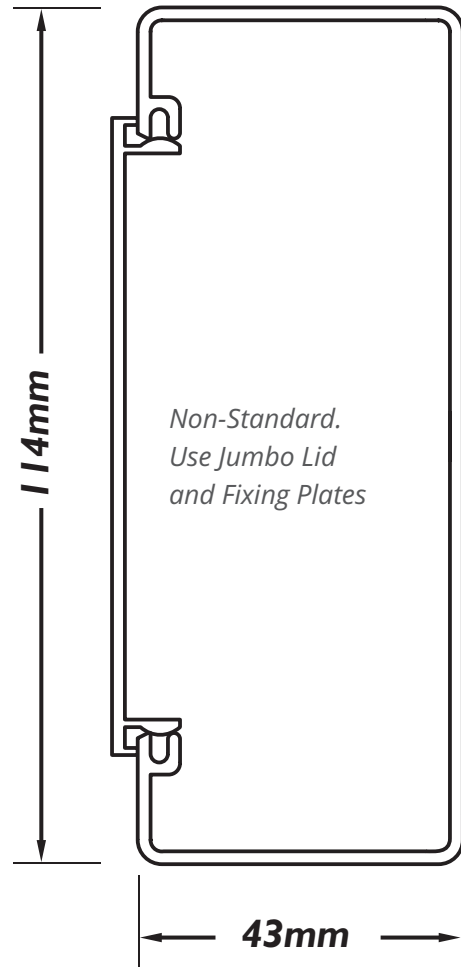

45 Degree End Caps
Left Ending - 115.1600
Right Ending - 115.1600



90 Degree End Cap
Right and Left Ending.
Rivet - screw fix to
profiles. 115.0620

Column Surrounds:
Site dimensions required ,Corner cover pieces
included
Two Sides - 115.1920.
Three Sides - 115.1930.
Four Sides - 115.1940, fabricated in two parts;
includes Joiners and provision for dropper feeds .